



FIG. 2

662220-4295260

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

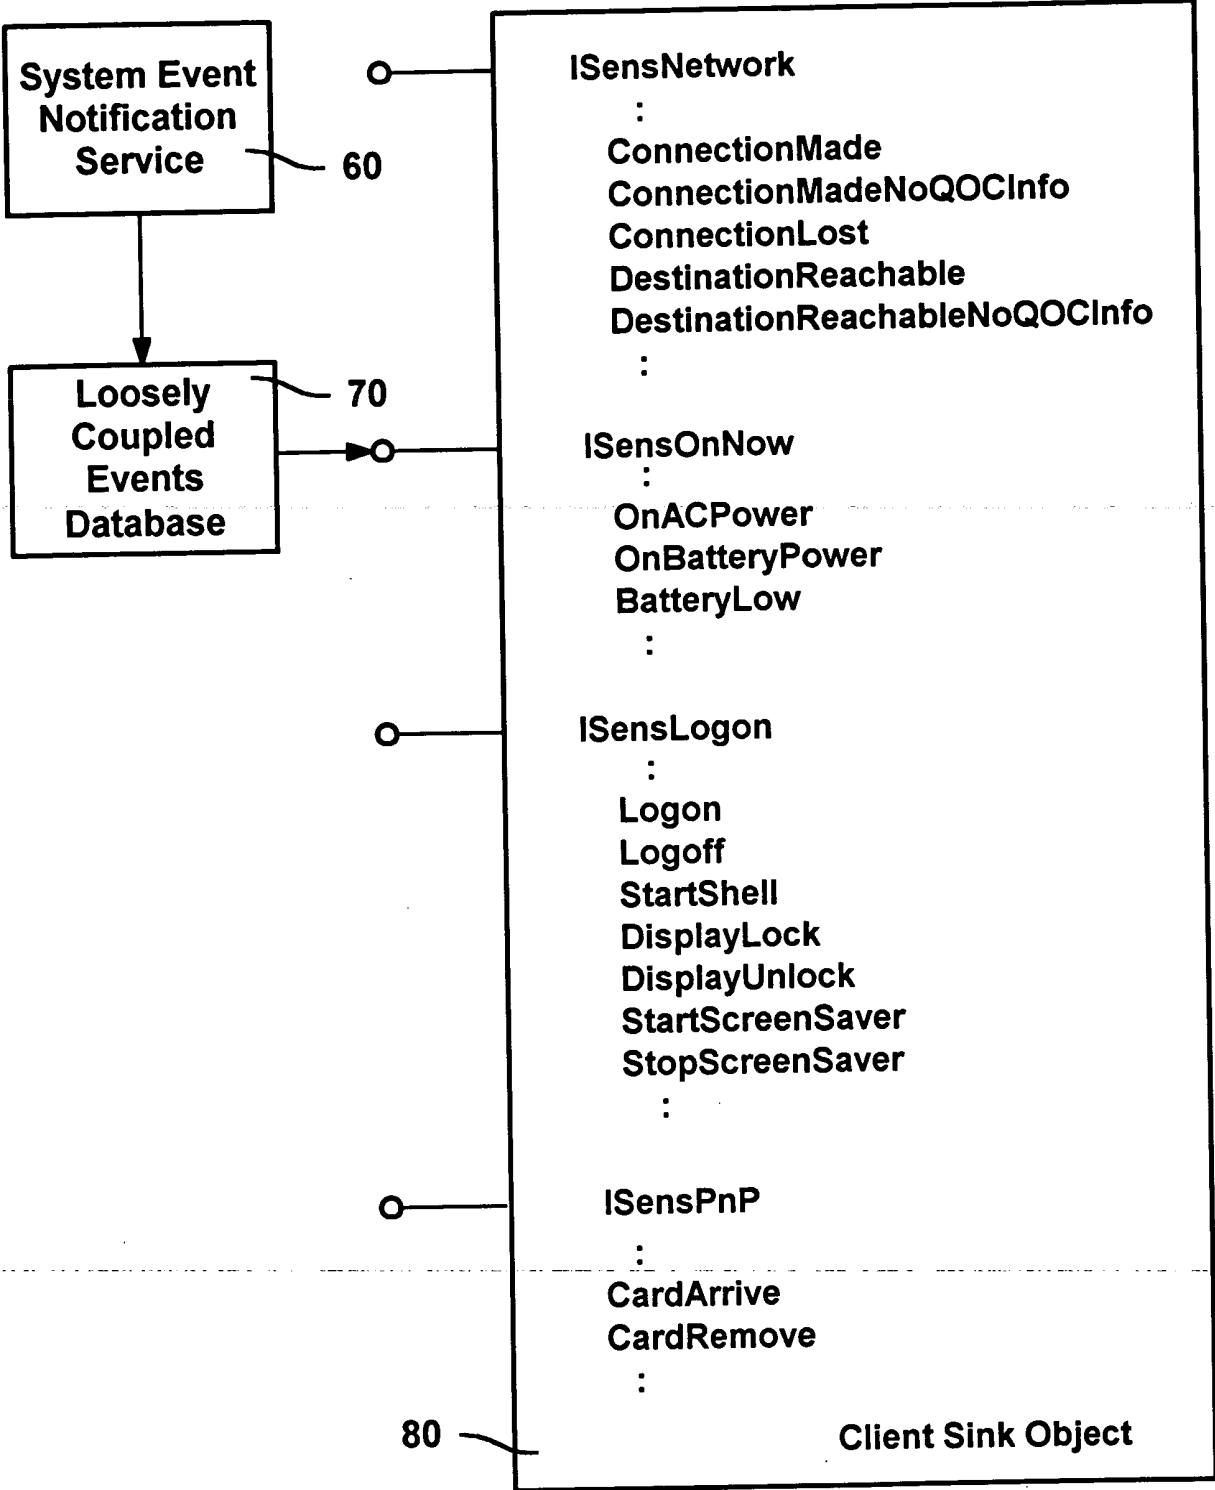

**FIG. 3**

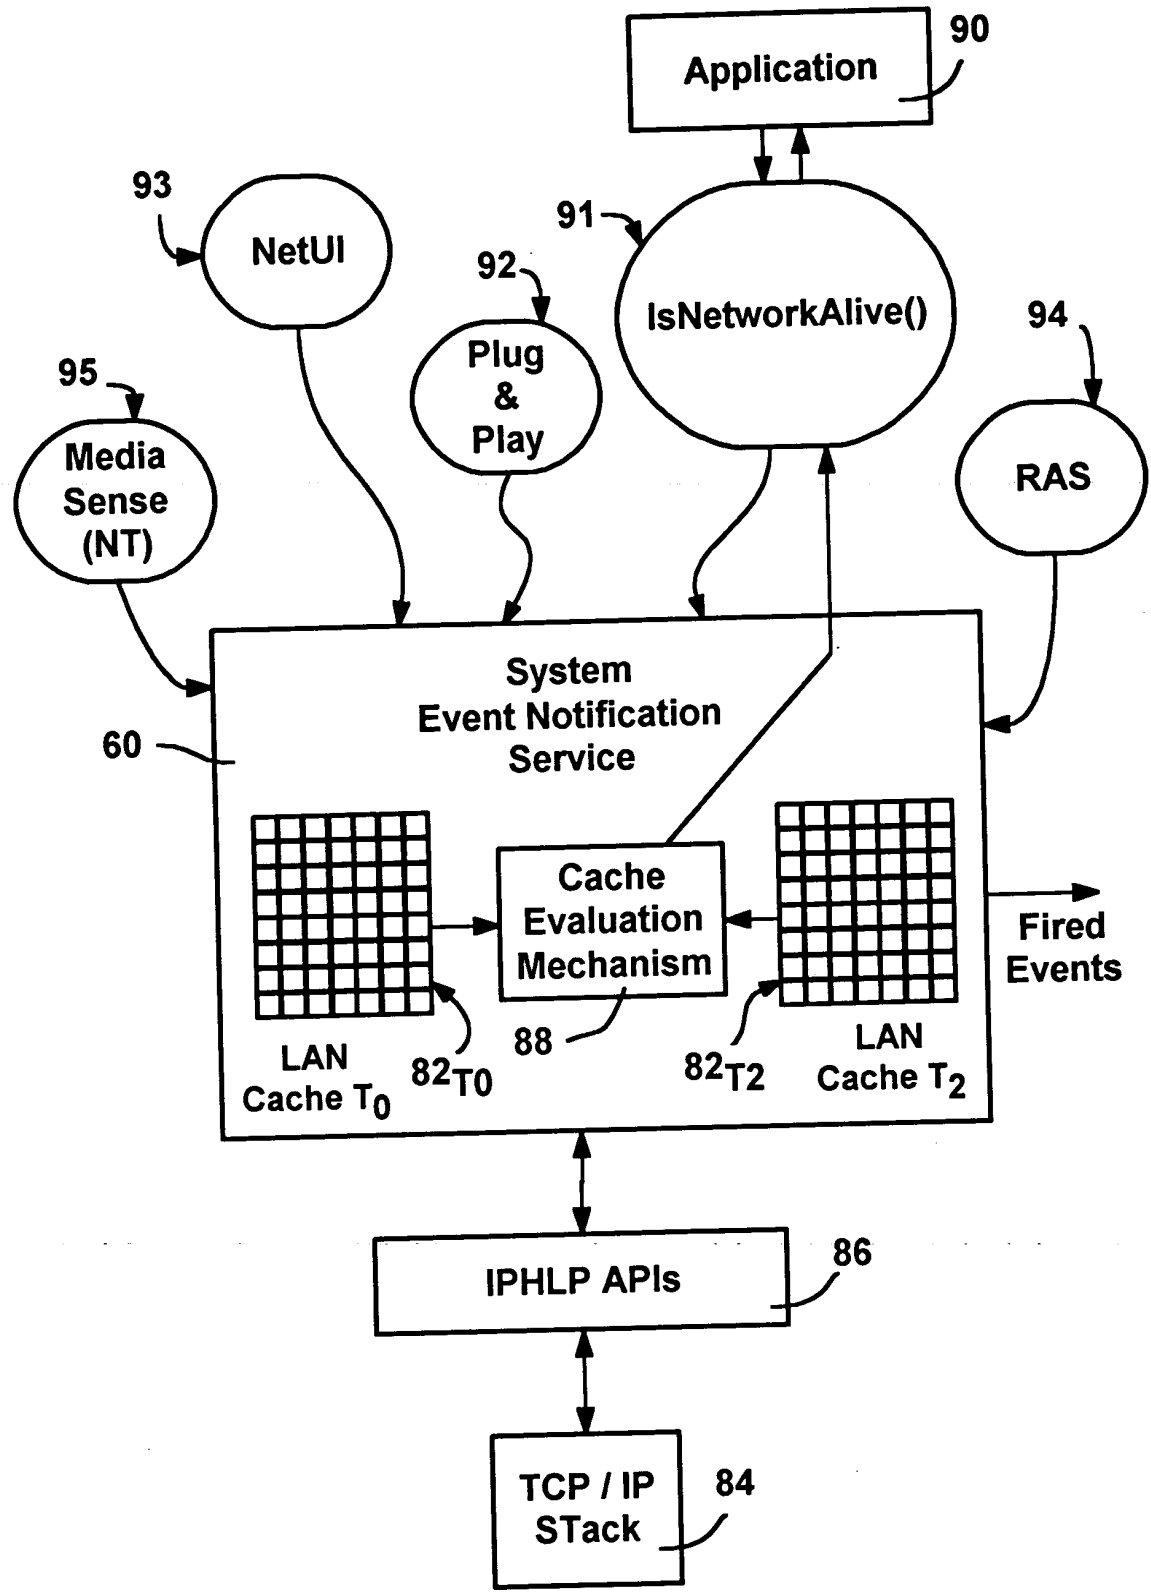

**FIG. 4**


66E220" 42995260

82T2

Interface Number	a) Incoming Packet Count (non-Unicast)	b) Outgoing Packet Count (Unicast)	c) Incoming Errors	d) Outgoing Errors	e) Incoming Packet Count (non-Unicast)	f) Outgoing Packet Count (Unicast)
2	1200	26	360	4	1660	84
6	900	22	65	2	2123	67
5	790	19	44	2	868	445
0	311	14	3	1	199	378
LAN Cache						


FIG. 5

FIG. 6

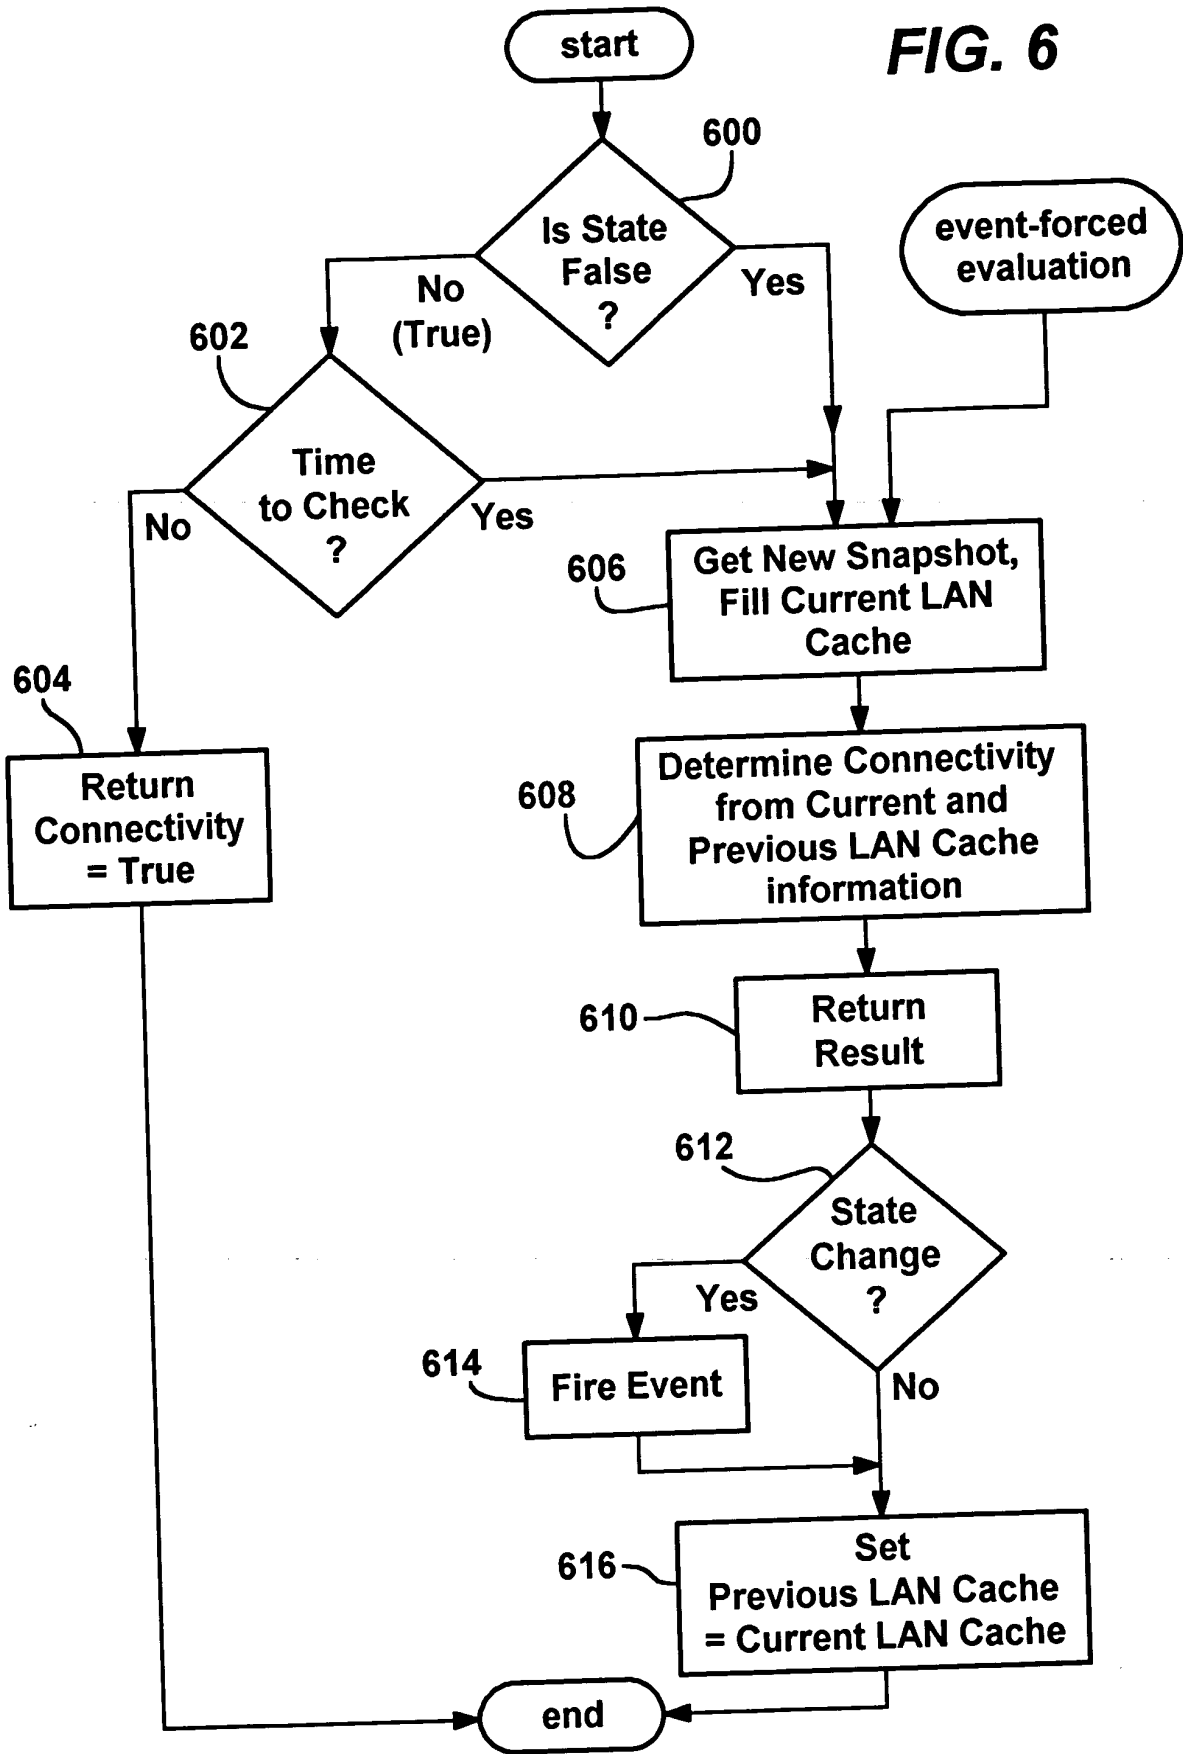

0925624-02399  
66E220-42995260

FIG. 7

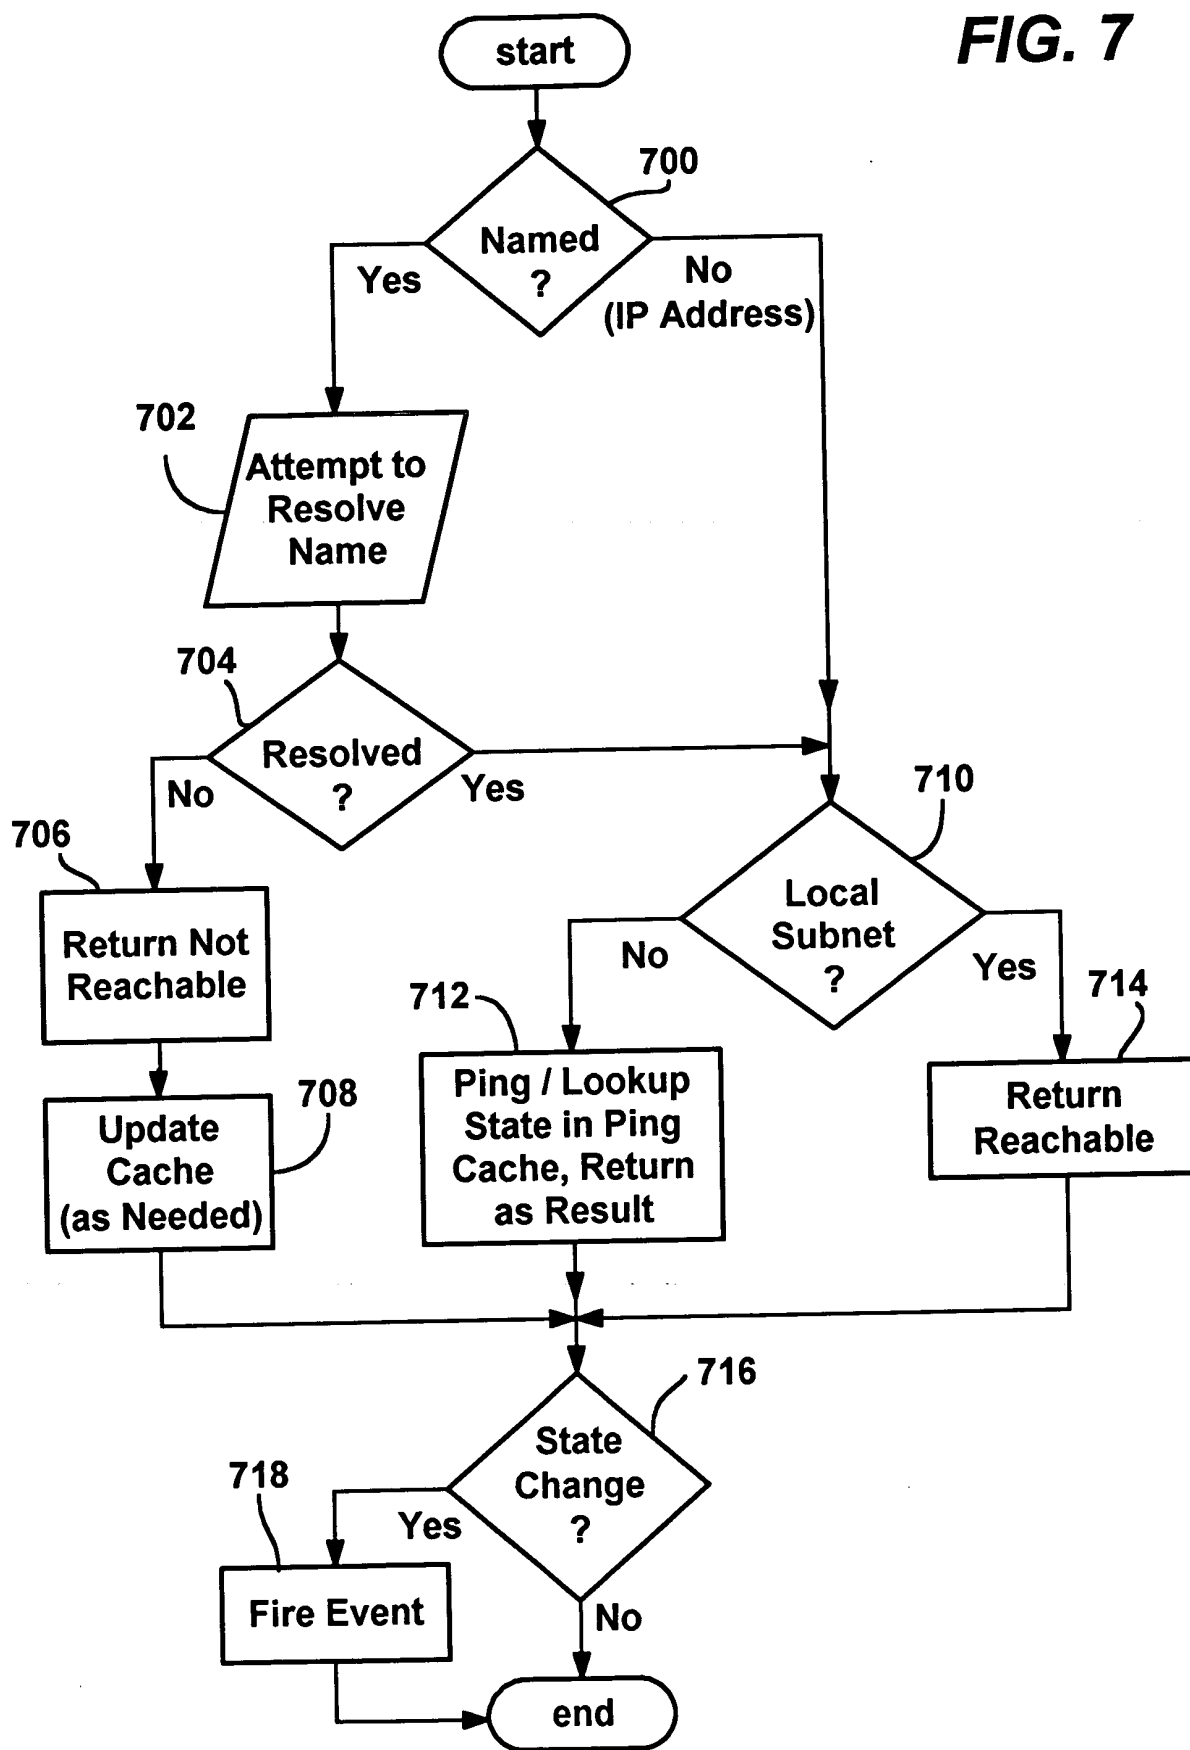

66E220" 42995250

Reach-ability Status	Dest.
Y	FOO
N	BAR
Y	WXYZ
Y	ABC
:	
Y	PQRYZ

FIG. 8

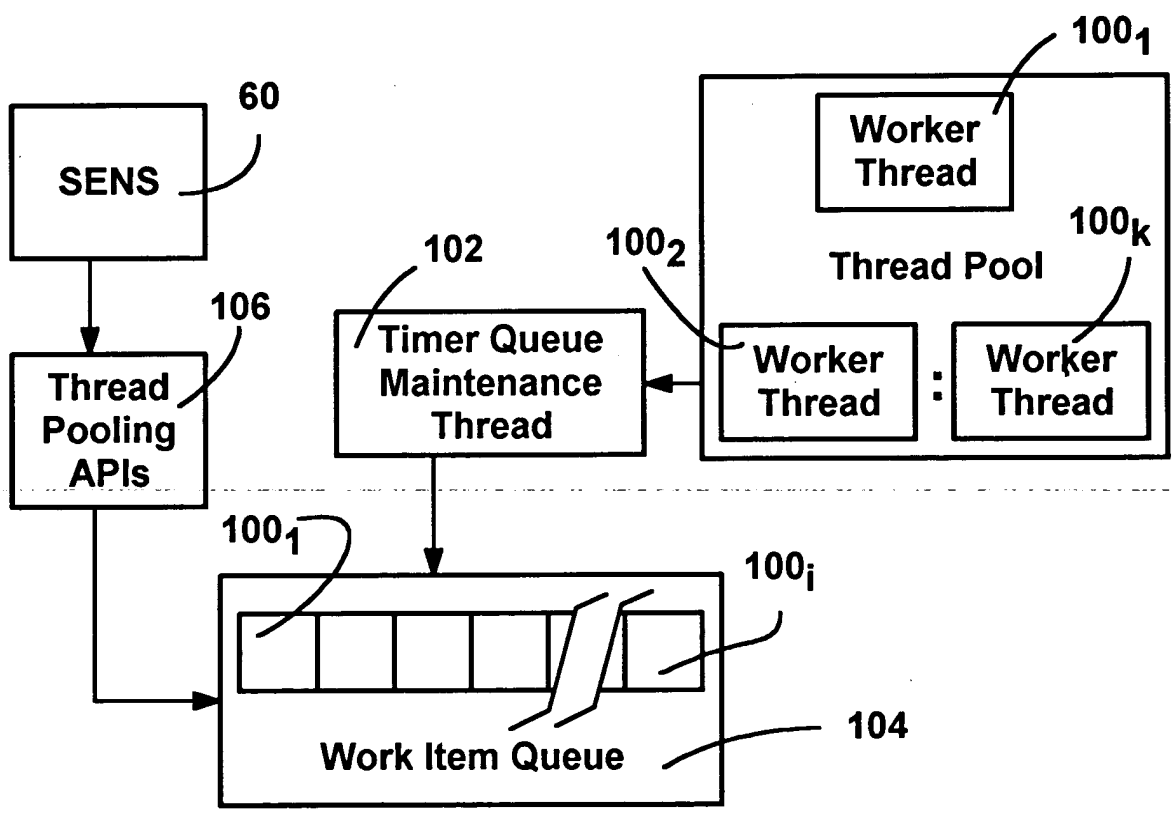


FIG. 9